




SINCE
1950

TRADITIONAL QUALITY **SORPTION CARPET** Nonwoven needle punched textile

NONWOVENS

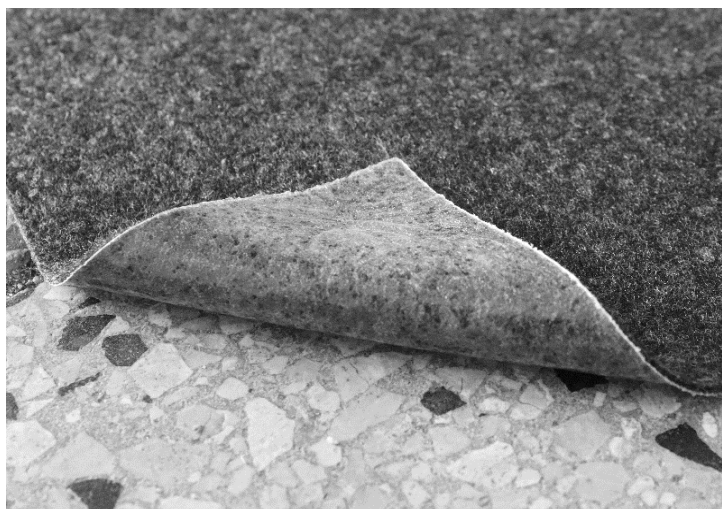

Characteristic: Nonwoven textile mechanically bonded by needle punching and laminated by transparent PE foil

Material content: 100 % Polypropylen staple fibers
PE foil, transparent, anti-slip, 20 - 25 g/m²*
EVA binder*

Colour: Grey

Certification: Management system according to standards ISO 9001, ISO 14001, ISO

Function: Sorption and trapping of drips, surface leakage of oil, lubricant or water.
Anti-slip finish.



OIL AND FATS
SORPTION



ANTI-SLIP

Use: Prevention of floor contamination



MAINTENANCE



INDUSTRY

* Only for sorption carpet type PE

Material specification sheet

Date: 20. 6. 2019

No.: T-021-1



TRADITIONAL QUALITY NONWOVENS

Material specification sheet

Date: 20. 6. 2019

No.: T-021-1

SORPTION CARPET

Nonwoven needle punched textile

SORPTION CARPET	M	PE	
PHYSICAL PROPERTIES			
Weight / EN ISO 9864	g/m ²	250	300 ± 10 %
Thickness 0,1 kPa / EN ISO 9073-2	mm	1,7	2 ± 10 %
DIMENSIONS			
Delivered format	roll		roll
Width	cm	91	91 ± 1 cm
length	m	30 or 45	31 or 45
CHARACTERISTICS			
Description	Nonwoven textile mechanically bonded by needle punching and laminated by transperated anti-slip PE foil		
Material content	100% PP staple fibers	100% PP staple fibres	
		PE anit-slip foil	
		EVA powder	
Surface finish of the reverse side	melting	PE anti-slip foil	
Colour	grey	grey	
PACKAGING AND STORAGE			
Packaging	Rolls are packed in PE foil.		
Storage	In covered, clean and dry spaces		

The above technical parameters are average values and serve for general information. The manufacturer reserves the right to change it.