




# TRADITIONAL QUALITY NONWOVENS

## UNTEX VSS

Protective non-flammable textile

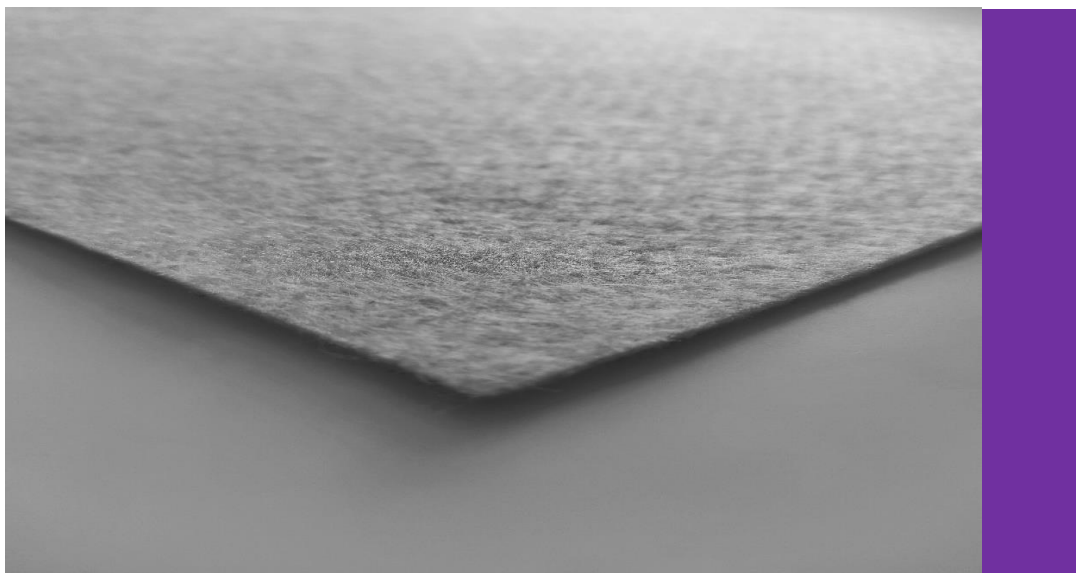

- Characteristic:** Needlepunched nonwoven protective non-flammable textile
- Material content:** 100% Viscose
- Colour:** White
- Weight:** 200 - 400 g/m<sup>2</sup>
- Maximum width:** 6500 mm
- Standard length:** 50 m
- Regular use:** Protective textile for rolling stock seating , special clothing equipment and industrail using



Material specification sheet

Date: 20.3.2023

Quality Management Systém ISO 9001, ISO 14001, ISO 45001 a ISO 50001



# TRADITIONAL QUALITY NONWOVENS

Material specification sheet

Date: 20.3.2023

## UNTEX VSS

Protective non-flammable textile

### Technical parameters

	UNTEX VSS	200	400
<b>PHYSICAL PROPERTIES</b>			
Weight [±10 %] / EN 29073-1	g/m <sup>2</sup>	200	400
Thickness [±10 %] / ČSN EN ISO 9073 - 2	mm	3	4
<b>FLAMMABILITY*</b>			
ČSN EN 45545-2+A1	R21	HL3	HL3
<b>DIMENSIONS, PACKAGING AND STORAGE</b>			
Maximum width [m]		6,5	6,5
Length [m]		50	50
Packaging		Rolls are packed in PE foil, and wind up without paper tubes	
Storage		In covered, clean and dry spaces	

The above technical parameters are average values and serve for general information. The manufacturer reserves the right to change it.

\* The following parameters were tested accredited by CZ Testing

