

TECHNOLOGICAL ADITIONAL QUALITY NONWOVENS



SINCE
1950


DOALEN / VUTEX

Nonwoven needle punched textile



STANDARD
100

PG035 217574
OETI

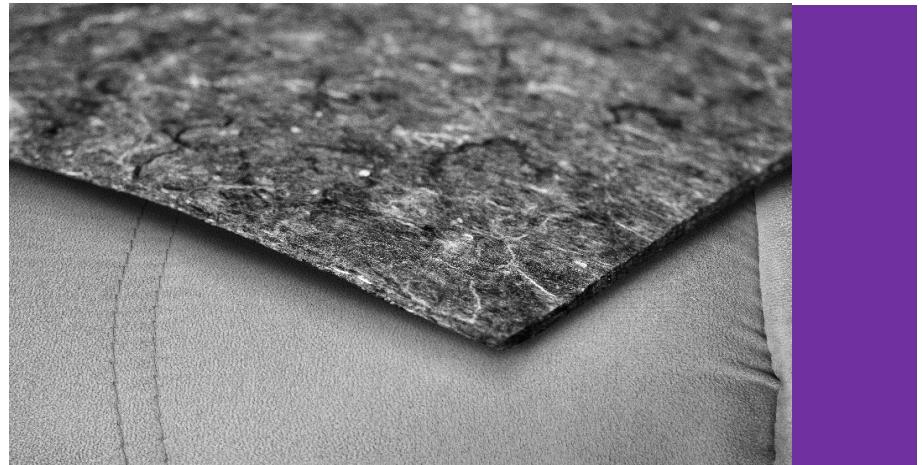

Characteristic: Nonwoven textile mechanically bonded by needle punching and coated

Material content: 100 % Recycled fibres
PVAC Binder

Color: Various

Weight: DOALEN: 300 to 800 g/m²
VUTEX: 400 to 600 g/m²

Standard width: 2 m

Function:



REINFORCEMENT

Use:



Material specification sheet

Date: 25. 11. 2025



TRADITIONAL QUALITY NONWOVENS

DOALEN / VUTEX

Nonwoven needle punched textile

	DOALEN	300	350	380	400	450	480	500	600	700	800
PHYSICAL PROPERTIES											
Weight [$\pm 15\%$] / EN 29073-1	g/m ²	300	350	380	400	450	480	500	600	700	800
Thickness [$\pm 15\%$] / ČSN EN ISO 9863-1	mm	3,1	3,4	3,5	3,7	3,9	4	4	4,5	5	5,4
Reinforcement	R	X	X	X	X	X	X	X	X	X	X
CHARACTERISTICS											
Description	Nonwoven textile mechanically bonded by needle punching and reinforced by PVAC binder										
Material content	100% Recycled fibres										
	PVAC binder										
Color	Various										
DIMENSION, PACKAGING AND STORAGE											
Maximum roll width [$\pm 2\text{ cm}$]	m	2	2	2	2	2	2	2	2	2	2
Roll lenght	m	50	50	50	50	50	50	50	50	50	50
Format dimensions [$\pm 1\text{ cm}$]	According to costumers needs										
Packaging	Rolls are packed in PE foil.										
Storage	In covered, clean and dry spaces										

	VUTEX	350	600	700
PHYSICAL PROPERTIES				
Weight [$\pm 15\%$] / ČSN EN 12 127				
Weight [$\pm 15\%$] / ČSN EN 12 127	g/m ²	400	430	500
Thickness [$\pm 15\%$] / ČSN EN ISO 9863-1 (2kPa)	mm	2,5	3,7	4,1
FUNCTION				
Reinforcement	R	X	X	X
CHARACTERISTICS				
Description	Nonwoven textile mechanically bonded by needle punching and reinforced by PVAC binder			
Material content	100% Recycled fibres			
	PVAC binder			
Color	Various			
DIMENSION, PACKAGING AND STORAGE				
Maximum roll width [$\pm 2\text{ cm}$]	m	2	2	2
Roll lenght	m	50	50	50
Packaging	Rolls are packed in PE foil.			
Storage	In covered, clean and dry spaces			

The above technical parameters are average values and serve for general information. The manufacturer reserves the right to change it.